


SWING GATE BARRIER MODEL SG-MAN-1200

ASTM M50 P1 (K12) CERTIFIED
MANUAL SWING GATE, QUICK INSTALLATION
LIGHT WEIGHT, OPERATED BY ONE PERSON

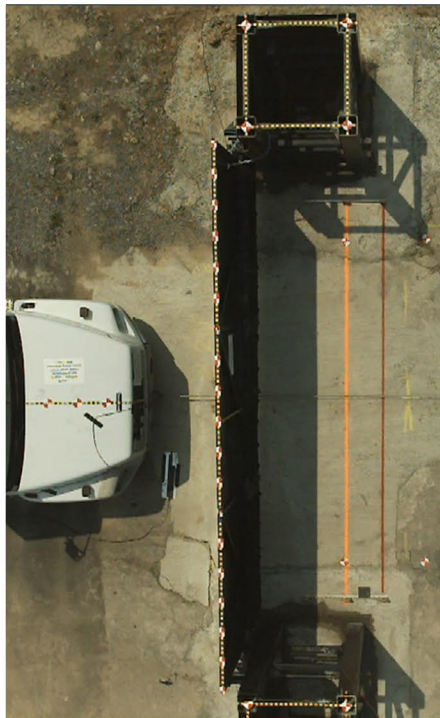

- ◆ Certified to stop 15,000 lb vehicle impact at 50 mph. ASTM F2656-07 M50 P1 certified.
- ◆ Department of Defense (DoD) approved and listed on Anti-Ram Vehicle Barrier List.
- ◆ One (1) person manually opens & closes light-weight gate.
- ◆ Custom gate heights from 6 feet to 16 feet.
- ◆ Custom gate widths from 8 feet to 24 feet.
- ◆ Gate latching and locking mechanism.
- ◆ Quick installation in about 1-1/2 days. Only 3 modular prefabricated system components.
- ◆ Connect any adjacent perimeter security barriers. This includes fences, concrete blocks, jersey barriers, cable barriers, or other perimeter security systems.
- ◆ Robust gate is a free standing barrier, and independent of adjacent attachments.
- ◆ Gate can swing open up to 160 degrees. Drop down pin to secure gate in opened position.
- ◆ End supports are reusable after massive impacts. A replacement gate is easily rehung on Gorilla bearing hinges.
- ◆ All weather use.
- ◆ Minimal maintenance and simple to use.
- ◆ Optional electric model with custom controls and alarms. Power requirement is one 220/220/230 volt, 20 amp single phase.
- ◆ Optional custom colors, placards, signs, markings, and hot dipped galvanized finish.